



割りピン

Split Pin

RoHS指令適合品

CADデータ: - / -

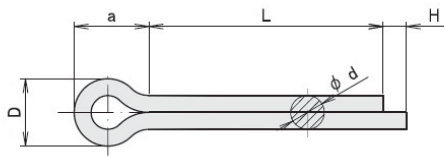

■材質 SUS304-W1

■注記

- 1) 呼び径はピン穴の径による。
- 2) dは先端からL/2の間における値とする。
- 3) 長さLは太線のわく内とし、わく内の数値はその許容差を示す。
- 4) 頭部は、軸芯から著しく傾いては成らない。

製品番号	呼び径	d		D		長さ L		a	H	適用するボルト及びピンの径				ピン穴径 (参考)	1袋価格(入り数) (円)
		mm	許容差	mm	許容差	mm	許容差			約	約	ボルトを 超え	以下		
WP-0.8×6L	0.8	0.7	0 -0.1	1.4	0 -0.2	6	±0.5	2.4	1.6	2.5	3.5	2	3	0.8	1,500 (50個入り)
10						1,500 (50個入り)									
WP-1×5L	1	0.9	0 -0.1	1.8	0 -0.2	5	±0.5	3	1.6	3.5	4.5	3	4	1	1,500 (50個入り)
8						1,500 (50個入り)									
15						1,500 (50個入り)									
20						1,500 (50個入り)									
WP-1.2×8L	1.2	1	0 -0.1	2	0 -0.3	8	±0.5	3	2.5	4.5	5.5	4	5	1.2	1,500 (50個入り)
12						1,500 (50個入り)									
18						1,500 (50個入り)									
WP-1.6×8L	1.6	1.4	0 -0.1	2.8	0 -0.4	8	±0.5	3.2	2.5	5.5	7	5	6	1.6	1,500 (50個入り)
12						1,500 (50個入り)									
15						1,500 (50個入り)									
20						1,500 (50個入り)									
25						1,500 (50個入り)									
30						±0.8	1,500 (50個入り)								
WP-2×10L	2	1.8	0 -0.1	3.6	0 -0.4	10	±0.5	4	2.5	7	9	6	8	2	1,500 (30個入り)
15						1,500 (30個入り)									
20						1,500 (30個入り)									
25						1,500 (30個入り)									
WP-2.5×10L	2.5	2.3	0 -0.2	4.6	0 -0.6	10	±0.5	5	2.5	9	11	8	9	2.5	1,500 (20個入り)
15						1,500 (20個入り)									
18						1,500 (20個入り)									
20						1,500 (20個入り)									
25						1,500 (20個入り)									
30						±0.8	1,500 (20個入り)								
WP-3×15L	3	2.7	0 -0.2	5.5	0 -0.7	15	±0.5	6	3.2	11	14	9	12	3	1,500 (20個入り)
20						1,500 (20個入り)									
25						1,500 (20個入り)									
30						±0.8									1,500 (20個入り)

ご注文例

製品番号と数量(何袋か)をご指定下さい

WP - 3×15L
 割りピン — 長さ
 呼び径

●仕様は予告なく変更する場合があります。